
Rev. 03 1011 525 EN

Operating instructions and Spare parts list

# **Application pump OptiSpray AP01.1**



Translation of the original operating instructions

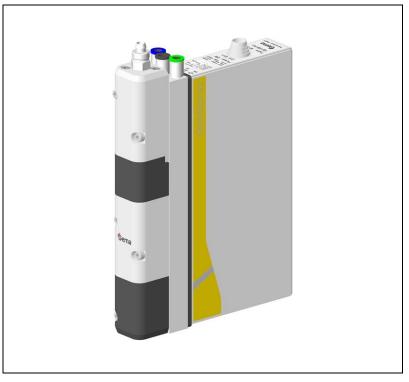



#### **Documentation OptiSpray AP01.1**

© Copyright 2017 Gema Switzerland GmbH All rights reserved.

This publication is protected by copyright. Unauthorized copying is prohibited by law. No part of this publication may be reproduced, photocopied, translated, stored on a retrieval system or transmitted in any form or by any means for any purpose, neither as a whole nor partially, without the express written consent of Gema Switzerland GmbH.

Gema, EquiFlow, MagicCompact, MagicCylinder, OptiCenter, OptiFlex, OptiGun, OptiSelect and OptiStar are registered trademarks of Gema Switzerland GmbH.

ClassicLine, ClassicStandard, ClassicOpen, DVC (Digital Valve Control), GemaConnect, MagicControl, MagicPlus, MonoCyclone, MRS, MultiColor, MultiStar, OptiAir, OptiControl, OptiColor, OptiFeed, OptiFlow, OptiHopper, OptiMove, OptiSieve, OptiSpeeder, OptiSpray, PCC (Precise Charge Control), RobotGun, SIT (Smart Inline Technology) und SuperCorona are trademarks of Gema Switzerland GmbH.

All other product names are trademarks or registered trademarks of their respective holders.

Reference is made in this manual to different trademarks or registered trademarks. Such references do not mean that the manufacturers concerned approve of or are bound in any form by this manual. We have endeavored to retain the preferred spelling of the trademarks, and registered trademarks of the copyright holders.

To the best of our knowledge and belief, the information contained in this publication was correct and valid on the date of publication. Gema Switzerland GmbH makes no representations or warranties with respect to the contents or use of this publication, and reserves the right to revise this publication and make changes to its content without prior notice.

For the latest information about Gema products, visit **www.gemapowdercoating.com**.

For patent information, see www.gemapowdercoating.com/patents or www.gemapowdercoating.us/patents.

#### Printed in Switzerland

Gema Switzerland GmbH Mövenstrasse 17 9015 St.Gallen Switzerland

Phone: +41-71-313 83 00 Fax.: +41-71-313 83 83

E-mail: info@gema.eu.com



# **Table of contents**

Abou	t these instructions	5
	General information	5
	Keeping the Manual	
	Safety symbols (pictograms)	
	Structure of Safety Notes	
	Presentation of the contents	
	Figure references in the text	
Safet	·y	7
	Basic safety instructions	7
	Product specific security regulations	8
Prod	uct description	9
	Intended use	ç
	Reasonably foreseeable misuse	
	Technical Data	
	Electrical data	
	Pneumatic data	
	Powder output (reference values)	11
	Dimensions	
	Sound pressure level	
	Rating plate	
	Design and function	
	Overall view	
	Powder hoses	13
	Spraying air function / diffusers	14
	Connections	15
	Scope of delivery	15
	Typical properties - Characteristics of the functions	16
	Main functions	16
	Secondary functions	16
	Conveying direction	16
	Powder hose rinsing	16
	Maintenance interval monitoring	17
Asse	mbly / Connection	19
	Assembly guide	19
	Connection instructions	
Start	-up	23
	Preparation for start-up	22
	Basic conditions	
	Basic conditions	
O	ation.	05
Oper	ation	25
	Operation	25



	Switching on and off the conveying procedure Switching on and off the rinsing procedure	
Maint	enance / Repairs	27
	General information	27
	Maintenance of the dense phase pump	
	Maintenance schedule	28
	Daily maintenance	
	Pinch valve diagnostic	
	Wearing parts	
	Cleaning	
	Cleaning the Application pump (color change)	
	Periodic checks	
	Repair work	
	Replacing the pinch valve hoses and filter elements  Pump disassembly	
	Replacing the pinch valve hoses	
	Replacing the filter elements	
	Replacing the solenoid valves for pinch valves control	
	Requirements on personnel carrying out the work	
	Replacing the solenoid valves	
	Replacing the Application pump in an OptiCenter	
Fault	clearance	39
· aait		•
Decor	nmissioning / Storage	43
	Shutdown	
	If in disuse for several days	
	Storage conditions	
	Hazard notes	
	Type of storageStorage duration	
	Space requirements	
	Physical requirements	
	Maintenance during storage	
	Maintenance schedule	
		44
	Maintenance works	
Dispo		
Dispo	sal	44 <b>45</b>
Dispo	sal Introduction	44 <b>45</b> 45
Dispo	sal IntroductionRequirements on personnel carrying out the work	44 <b>45</b> 45
Dispo	sal IntroductionRequirements on personnel carrying out the workDisposal regulations	44 <b>45</b> 4545
Dispo	Sal IntroductionRequirements on personnel carrying out the workDisposal regulationsMaterials	44 <b>45</b> 454545
Dispo	sal IntroductionRequirements on personnel carrying out the workDisposal regulations	44 <b>45</b> 454545
	Introduction	44 <b>45</b> 4545454545
	Introduction	44 <b>45</b> 454545454545
	Introduction	44 <b>45</b> 45454545454545
	Introduction	44 454545454545454545
	Introduction	
	Introduction	44 45454545454545454545454545



## **About these instructions**

## **General information**

This operating manual contains all important information which you require for the working with the OptiSpray AP01.1. It will safely guide you through the start-up process and give you references and tips for the optimal use when working with your powder coating system.

Information about the functional mode of the individual system components should be referenced in the respective enclosed documents.

## **Keeping the Manual**

Please keep this Manual ready for later use or if there should be any queries.

## Safety symbols (pictograms)

The following warnings with their meanings can be found in the Gema instructions. The general safety precautions must also be followed as well as the regulations in the relevant instructions.

#### **A** DANGER

Indicates a hazardous situation which, if not avoided, will result in death or serious injury.

#### **MARNING**

Indicates a hazardous situation which, if not avoided, could result in death or serious injury.

#### **A** CAUTION

Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

#### **ATTENTION**

Indicates a potentially harmful situation. If not avoided, the equipment or something in its surrounding may be damaged.



#### **ENVIRONMENT**

Indicates a potentially harmful situation which, if not avoided, may have harmful consequences for the environment.



#### **MANDATORY NOTE**

Information which must be observed.



#### **NOTICE**

Useful information, tips, etc.

#### **Structure of Safety Notes**

Every note consists of 4 elements:

- Signal word
- Nature and source of the danger
- Possible consequences of the danger
- Prevention of the danger

#### **A** SIGNAL WORD

Nature and source of the hazard!

Possible consequences of the danger

Prevention of the danger

## Presentation of the contents

## Figure references in the text

Figure references are used as cross references in the descriptive text.

#### Example:

"The high voltage  $(\mathbf{H})$  created in the gun cascade is guided through the center electrode."



# **Safety**

## **Basic safety instructions**

- This product is built to the latest specification and conforms to the recognized technical safety regulations and is designed for the normal application of powder coating.
- Any other use is considered non-compliant. The manufacturer shall
  not be liable for damage resulting from such use; the user bears sole
  responsibility for such actions. If this product is to be used for other
  purposes or other substances outside of our guidelines then Gema
  Switzerland GmbH should be consulted.
- Start-up (i.e. the execution of intended operational tasks) is forbidden until it has been established that this product has been set up and wired according to the guidelines for machinery. The standard "Machine safety" must also be observed.
- Unauthorized modifications to the product exempt the manufacturer from any liability from resulting damage.
- The relevant accident prevention regulations, as well as other generally recognized safety regulations, occupational health and structural regulations are to be observed.
- Furthermore, the country-specific safety regulations also must be observed.

OptiSpray AP01.1 Safety • 7



## **Product specific security regulations**

- This product is a constituent part of the equipment and is therefore integrated in the system's safety concept.
- If it is to be used in a manner outside the scope of the safety concept, then corresponding measures must be taken.
- The installation work to be done by the customer must be carried out according to local regulations.
- It must be ensured, that all components are earthed according to the local regulations before start-up.



For further security information, see the more detailed Gema safety regulations!

#### **A** WARNING

#### **Working without instructions**

Working without instructions or with individual pages from the instructions may result in damage to property and personal injury if relevant safety information is not observed.

- ▶ Before working with the device, organize the required documents and read the section "Safety regulations".
- ► Work should only be carried out in accordance with the instructions of the relevant documents.
- ► Always work with the complete original document.

8 • Safety OptiSpray AP01.1



# **Product description**

#### Intended use

The Application pump is intended for conveying coating powder (no enamel) to the powder gun.

The application pump operates only in combination with the OptiStar CG12-CP (automatic equipment) or the OptiStar CG11-P Control unit (manual equipment).

The application pump will only operate in combination with the OptiGun GA03-P automatic gun or with other Gema models with a suitable diffuser (spraying air adapter). Please contact Gema if you have any further queries.



fig. 1

Observance of the operating, service and maintenance instructions specified by the manufacturer is also part of conformity of use. This product should only be used, maintained and started up by trained personnel, who are informed about and are familiar with the possible hazards involved.

Any other use is considered non-compliant. The manufacturer is not responsible for any incorrect use and the risks associated with such actions are assumed by the user alone!



For a better understanding of the interrelationships in powder coating, it is recommended that the operating instructions for all other components be read as well, so as to be familiar with their functions too.

## Reasonably foreseeable misuse

- Operation without the proper training
- Use with insufficient compressed air quality
- Input pressure too low
- Use in connection with unauthorized coating devices or components

## **Technical Data**

#### **Electrical data**

OptiSpray AP01.1	
Nominal input voltage	24 VDC
Performance	10 VA
Protection type	IP54
Temperature range	+15 °C - +40 °C (+59 °F - +104 °F)
Temperature class	T6
Approvals	C € €x II3D

#### Pneumatic data

OptiSpray AP01.1	
Compressed air connection	Quick release connection - 8 mm
Inlet pressure	6 bar
Max. compressed air consumption	≈ 2.0 Nm³/h
Max. water vapor content of the compressed air	1.3 g/m³
Max. oil vapor content of the compressed air	0.1 mg/m³

10 • Product description



## **Powder output (reference values)**

OptiSpray AP01.1	
In OptiCenter:  Conveying hose till 20 m – internal Ø 7 mm suction tube/hose till 30 cm – internal Ø 4,5 mm	50-300 g/min
In manual equipment:  Conveying hose till 20 m – internal Ø 7 mm suction hose max. 1.5 m – internal Ø 4,5 mm	50-300 g/min

#### **Dimensions**

OptiSpray AP01.1	
Height (basic module, without connections)	275 mm
Width	40 mm
Depth	183 mm
Weight (basic module, without connections)	3.2 kg

#### Sound pressure level

OptiSpray AP01.1	
Normal operation	< 60 dB(A)

The sound pressure level was measured while the unit was in operation; measurements were taken at the most frequent operator positions and at a height of 1.7 m from the ground.

The specified value is applicable only for this product itself and does not take into account external noise sources or cleaning impulses.

The sound pressure level may vary, depending on the product configuration and space constraints.



## Rating plate



fig. 2



## **Design and function**

#### **Overall view**




fig. 3

#### A Suction side

- 1 Pinch valve housing (suction side)
- 2 Filter element bodies with filter elements (suction side)

#### B Transport side

- 3 Pinch valve housing (transport side)
- 4 Filter element bodies with filter elements (transport side)
- 5 Pneumatic system and electronics

#### **Powder hoses**

Depending the application, different powder hoses are used for the suction and conveying procedure. The corresponding hose connections with nuts with kink protection must be used!

Application	Suction side	Transport side
In OptiCenter OC03/OC05	Inside diameter 4.5 mm OptiCenter suction tube/hose max. 30 cm	Inside diameter 7 mm
In manual equipment OptiFlex 2 Spray	Inside diameter 4.5 mm, hose length max. 1.5 m	Inside diameter 7 mm





#### Other hose diameters can also be used for certain applications.

- Only use other hose diameters with the explicit recommendation of Gema!
- On the transport side, a powder hose with conductive strip must be used (electrically conductive)!

## Spraying air function / diffusers

The coating guns to be used must be equipped with the appropriate spraying air function or with an appropriate diffuser adapter.

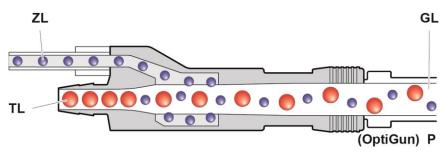


fig. 4: Air streams in the diffuser adapter

GL Total airZL Spraying airTL Transport airP Gun

The OptiGun GA02 automatic gun and the OptiSelect GM03 manual gun must also be equipped with an appropriate diffuser adapter.

The diffuser is grounded through the powder transport hose with conductive strips!



#### **Connections**

#### Compressed air hoses / cables



fig. 5: Connections – Compressed air hoses / cables

Connection	Description	
1.1	Compressed air (Air Supply IN) connection	
1.2	Transport air (Conveying Air IN) connection	
1.6	Pinch valve air connection	
2.5	External signal connection	

#### Pin assignment

#### Connection 2.5 Ext., 12-pins

**A-H** Control signal

**J-M** +24 VDC

Body – grounding PE



## Scope of delivery

- Mains cable
- Operating manual



## **Typical properties - Characteristics of the functions**

#### **Main functions**

- Conveying coating powder from or a fluidized container to the powder gun
- Processing signals from the superordinated OptiStar CG12-CP or CG11-P Control unit

#### **Secondary functions**


Powder hose rinsing and cleaning of the filter elements

## **Conveying direction**



The Application pump conveying direction is defined by the direction of arrow, that means, the suction side is on the bottom, the transport side on the top (see picture).

#### Powder hose rinsing



The powder hose rinsing enables the cleaning of the powder hoses and the filter elements in the Application pump. If color changes take place, rinsing must be done in conveying and in suction direction.

#### Cleaning programs

The OptiStar Gun control unit features three cleaning programs:



- Powder chamber emptying combined with hose cleaning in both directions
- Cleaning the hose to the gun only
- Cleaning the hose on the suction side only

(For details, see the operating instructions of the corresponding gun control unit)



#### **ATTENTION**

Large dust formation possible!

► The conveying hose and the powder gun must be pointed into the booth during the cleaning procedure!

The Ultra sonic sieve can be damaged during cleaning when being used with an OptiCenter.

► Only the original lid (without any sieve insert) must be assembled and closed on the OptiSpeeder!

The pump is to be cleaned as a component of the entire system.

#### **Maintenance interval monitoring**

This function is provided by the OptiStar CG12-CP or the CG11-P Control unit.





# **Assembly / Connection**

## **Assembly guide**

The application pump can be used in an OptiCenter OC03/OC05 Powder management center or as a part of the OptiFlex 2 Spray (B or F) manual equipment.



fig. 6

#### **ATTENTION**

#### Surrounding temperature too high

▶ Install the Application pump only in locations with an ambient temperature of between +15 and +40 °C, i.e. never next to heat sources (such as an enameling furnace) or electromagnetic sources (such as a control cabinet).



## **Connection instructions**

The Gun control unit and the Application pump(s) are supplied ready for use by the manufacturer. Just a few cables and hoses must be connected.


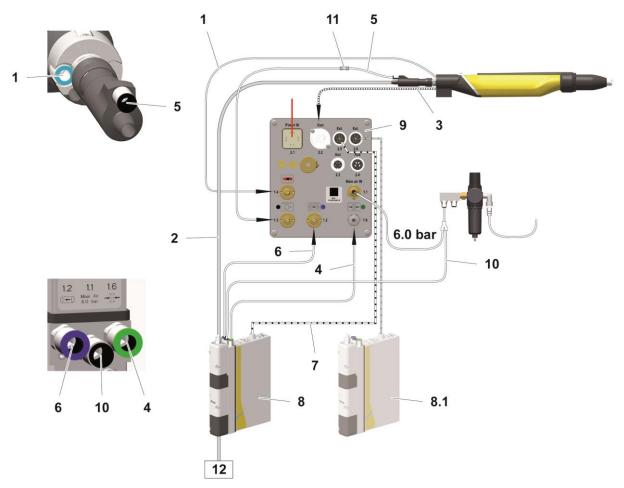


fig. 7: Connecting guide - overview

- I Electrode rinsing air hose
- 2 Powder hose
- 3 Gun cable
- 4 Pinch valve air
- 5 Spraying air hose
- 6 Transport air hose
- 7 Control signal cable

- 8 Application pump no. 1
- 8.1 Application pump no. 2
- 9 Gun control
- 10 Compressed air hose
- 11 Hose coupling Ø 8/6 Ø 6/4 mm
- 12 Powder hopper





Check ground connections with Ohm meter and ensure
 1 MOhm or less.



Close the unused connections with the provided dust protection caps!





## Start-up

## **Preparation for start-up**

#### **Basic conditions**

When starting up the Application pump, the following basic conditions, which have an influence on the powder transport, must be considered:

- Characteristic of hose layout
- Length and height difference of the suction distance: max. 30 cm
- Length of the conveying distance: 10-25 m
- Corresponding power and compressed air supply available
- Powder preparation and powder quality

#### **Basic information**

The adherence of the following principles leads to a successful start-up of the Application pump:

- The suction distance is to be kept as short as possible
- Basically, the powder transport with the Application pump works with every powder type, which can be fluidized. If the powder is for example humid or contaminated with other materials, then the conveying can be negatively influenced or does not work at all
- At the suction area, a homogeneous fluidization must be ensured, so that no air ducts (craters) can be formed
- The Application pump is not intended for use with enamel powders



24 • Start-up OptiSpray AP01.1



# **Operation**

## **Operation**



During the initial commissioning of the device, the functional check is to be performed without powder!

#### Switching on and off the conveying procedure

The conveying procedure is switched on and off by the pump control (see the corresponding operating manual).

#### Switching on and off the rinsing procedure

The rinsing procedure is switched on and off by the pump control (see the corresponding operating manual).



For a better understanding of the interrelationships in powder coating, it is recommended to read completely the operating instructions of the control unit and the powder gun, so as to be familiar with their functions too.

OptiSpray AP01.1 Operation • 25



26 • Operation OptiSpray AP01.1



# **Maintenance / Repairs**

#### **ATTENTION**

Any unauthorized modifications and alterations to the product are not permitted for safety reasons and exclude the manufacturer's liability for any resulting damage!



Regular, careful cleaning and maintenance extends the service life of the product and ensures long-lasting, uniform coating quality!

 The parts to be replaced during maintenance work are available as spare parts. For further information, see chapter "Spare parts list".

## **General information**

The product is designed to require a minimum of maintenance.



## Maintenance of the dense phase pump

#### Maintenance schedule

The following components or modules are subject to a maintenance plan:

- Pinch valves
- Filter elements

The service life of the filter elements and pinch valves depends on the service duration, the powder quality and the quality of the air supply.

#### **Daily maintenance**

Clean the Application pump with a dry cloth and check the connection points of the powder hoses. Replace the powder hoses, if necessary.

Rinse the Application pump by using the rinsing program. Therewith, the filter elements are cleaned and possible, unintended powder deposits in the Application pump and in the powder hoses are avoided.

#### Pinch valve diagnostic

The pinch valve diagnostic is to be carried out, in order to maintain the coating quality or after the error message **H89**is displayed.

The prerequisites for the diagnostic:

- Exhaust at suction and conveyance side must be present and in operation
- Powder hopper must be empty
- Cleaning program completed



## The pinch valve diagnostic is to start after the cleaning program has been completed!

 The detailed procedure is explicitly described in the CG12-CP/CG11-P Gun control unit operating instructions.

If the error message **H87/H187** (suction pinch valve) or **H88/H188** (conveying pinch valve) is displayed after the procedure has been completed, the corresponding pinch valve hoses must be replaced – see below.

## **Wearing parts**

The wearing parts to be replaced during the OptiSpray AP01 Application pump maintenance are available separately (see spare parts list).



# Cleaning

#### **Cleaning the Application pump (color change)**

For the preparation of a color change, the pump has to be rinsed.



The rinsing procedure can be started and stopped only externally via control unit or plant control.

The Application pump must be cleaned at least once per shift!

## **Periodic checks**

The periodic checks include examining all connecting cables and hoses.

The corresponding parts should be replaced immediately if any damage to cables or hoses is discovered.

All plugs must be properly tightened.



## Repair work

In the event of malfunctions or faults, the product must be checked and repaired by an authorized Gema service workshop. The repairs must only be performed by an authorized specialist.

Improper tampering can result in serious danger for user and equipment.

## Replacing the pinch valve hoses and filter elements



Before dismantling/changing the filter elements, it is necessary to clean the Application pump in both directions by using the rinsing program!

#### Required spare parts

AP01.1 Service set / Gema order no. 1015 435



fig. 8

- 1 Filter element
- 2 Pinch valve hose
- 3 Fluid blocking ring
- 4 Braided sleeve
- 5 O-ring




## Required Tools



fig. 9


- 1 Dismantling tool (Order number: 1012 909)
- 2 Open-ended wrench 16 mm
- 3 Allen key size 4 mm
- 4 Allen key size 3 mm

## **Pump disassembly**

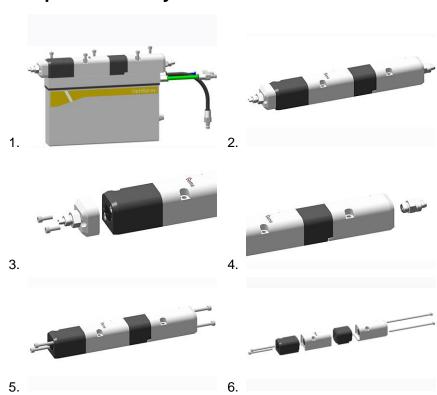




## Replacing the pinch valve hoses

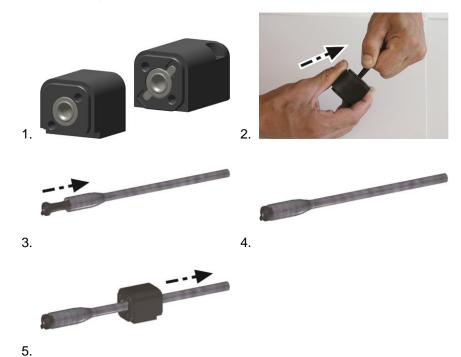

#### **ATTENTION**

Incorrect inserted pinch valve hose causes malfunctions

- ▶ It is imperative to consider the position of the lens-shaped opening!
- Make sure that the positioning tabs are set correctly!



#### **ATTENTION**

Broken pinch valve hose may cause the clogging of the fluid blocking plate

► Clean or replace the corresponding fluid blocking plate!



#### Replacing the filter elements

#### **ATTENTION**

Use of non-permissible cleaning agents may cause damage to the plastic pinch valve body


- ► When cleaning the pinch valve bodies, do not use alcohol, acetone, benzol or other solvents!
- ► For cleaning, use benzine, light lye or acid or a cleaning agent!



#### **ATTENTION**

#### Incorrectly assembled parts may cause malfunctions or defects

- The assembly takes place in reverse order!
- ▶ The tightening torques are to be observed, when assembling!
- ► The process zone has to be pressed against a planar surface and assembled on it!

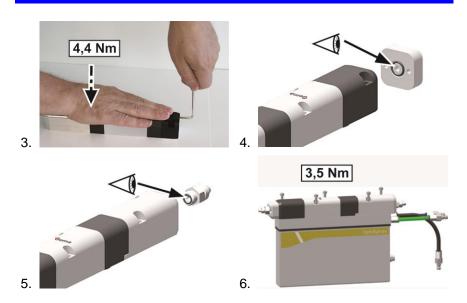



Operate the Application pump with powder at least 1/2 hour after replacing the filter elements.

 After the running-in of the filter elements a stable powder output value will be reached.

## Replacing the solenoid valves for pinch valves control

# Requirements on personnel carrying out the work

All work should be carried out only by authorized technical personnel.





Before dismantling/changing the solenoid valves, it is necessary to clean the Application pump in both directions by using the rinsing program!

#### Required Tools

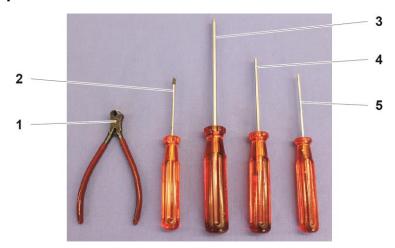


fig. 10

- 1 Side cutter
- 2 Phillips screwdriver PH0
- 3 Hexagon screwdriver 4 mm
- 4 Hexagon screwdriver 3 mm
- 5 Hexagon screwdriver 2.5 mm

#### Required spare parts

AP01 Solenoid valve		Gema order no.
V1	Suction pinch valve	1009 936
V2	Conveying pinch valve	1009 936



## Replacing the solenoid valves










2.

1.




3.



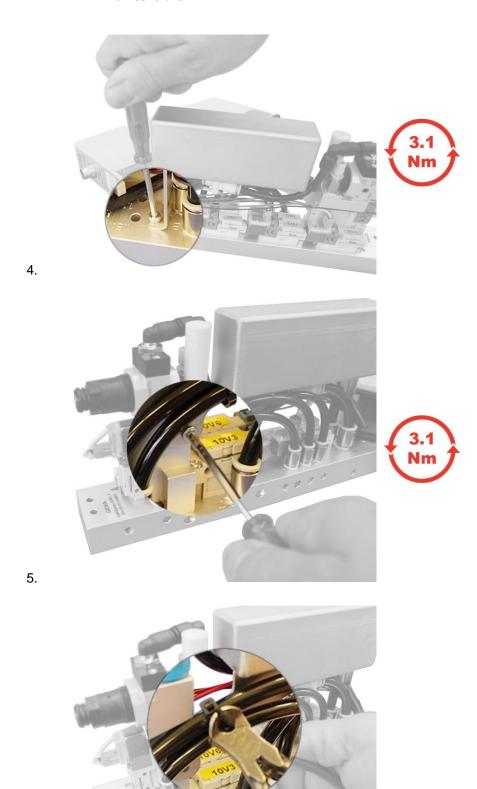

6.




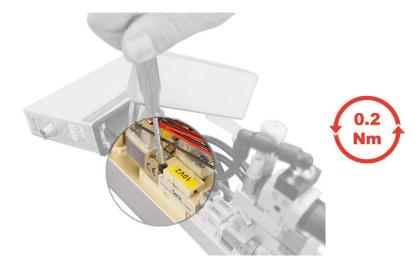

7.



8.



9.

The assembly takes place in reverse order!



## Replacing the Application pump in an OptiCenter

- 1. Remove the powder from the system
- 2. Start the cleaning program, rinse in both directions
- 3. Depressurize/vent OptiCenter
- 4. Next steps are described in the corresponding OptiCenters operating manual



## **Fault clearance**



Prior to any troubleshooting measures, always check the parameters configured in the control unit!

► See operating manual OptiStar CG12-CP/CG11-P!

Incident	Causes	Corrective action
Application pump does	No control signal	Check the control cable
not convey	Compressed air supply failed or pressure too low	Check the compressed air source (ensure an air pressure of 7-10 bar), check the pressure gauge of the local pressure regulator
	No transport air present	Check the hose connection of the control unit to the Application pump Check the compressed air supply
	No fluidization in the suction zone	Ensure the fluidization
	Service life of the pinch valve has expired (defective)	Change the pinch valve, check the pneumatic system for defects and replace, if necessary
	Service life of the filter element runs off (clogged)	Replace the filter element
Application pump conveys irregularly or too little powder	Pinholing in the powder container, powder will not be fluidized well	Adjust the fluidization correctly
	Hose backpressure is larger than 1.2 bar	Powder hose is too long or too thin Powder hose is clogged or bend (clean or replace it) Filter elements (filter chamber/pinch valve hose) are clogged (clean or replace them)
	Filter elements tend to clogging	Run the rinsing program, replace the filter elements
	Powder hoses tend to clogging due to sintering	Clean or replace the powder hoses
	Oil or water in the system	Ensure that oil or water will be separated before entering into the Application pump


OptiSpray AP01.1 Fault clearance • 39



Incident	Causes	Corrective action	
	Transport air offset C3 not adapted to powder output		

40 • Fault clearance OptiSpray AP01.1



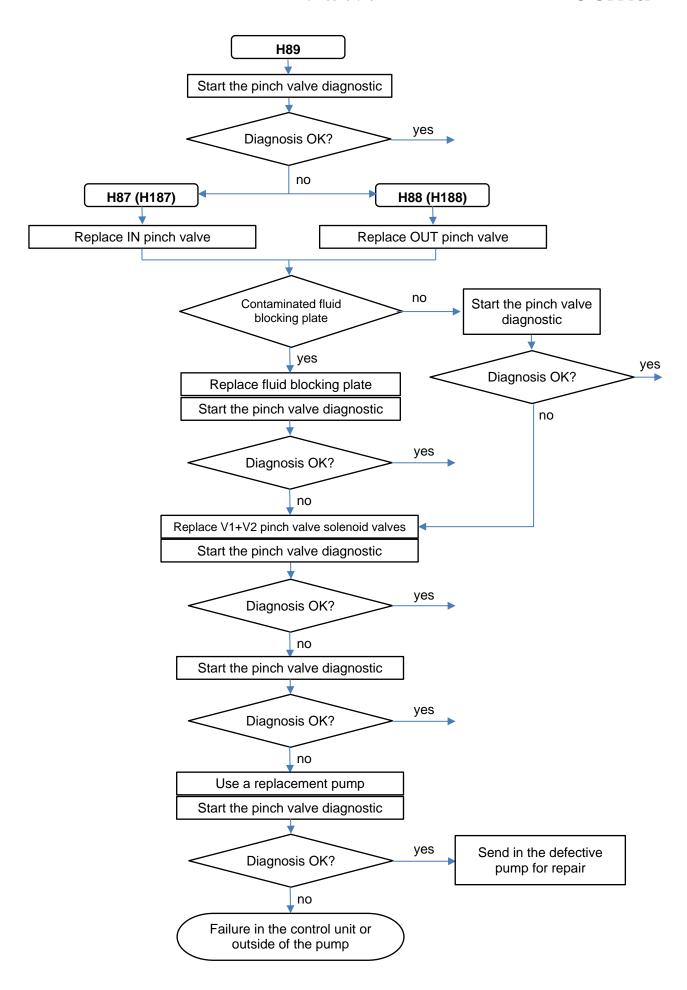

OptiSpray AP01.1 Fault clearance • 41



42 • Fault clearance OptiSpray AP01.1



## **Decommissioning / Storage**

### **Shutdown**

- End the coating procedure
- 2. Switch off the control unit



The adjustments for high voltage, powder output volume and electrode rinsing air remain stored.

### If in disuse for several days

- Switch off the plant with the main switch
- 2. Clean the gun and the components for powder conveying (see therefore the corresponding user manuals)
- Turn off the compressed air main supply

## **Storage conditions**

#### **Hazard notes**

There is no danger to personnel or the environment if the unit is stored properly.

## Type of storage

For safety reasons, the product should only be stored in a horizontal position

## Storage duration

If the physical conditions are maintained, the unit can be stored indefinitely.

## Space requirements

The space requirements correspond to the size of the product.

There are no special requirements concerning distance to neighboring equipment.



### **Physical requirements**

Storage must be inside a dry building at a temperature between +5 and +50 °C. Do not expose to direct sunlight!

## **Maintenance during storage**

### **Maintenance schedule**

No maintenance schedule is necessary.

#### **Maintenance works**

During long-term storage, periodically perform a visual check.



## **Disposal**

### Introduction

# Requirements on personnel carrying out the work

The disposal of the product is to be carried out by the owner or operator.

When disposing of components that are not manufactured by Gema, the instructions in the respective manufacturer's documentation must be observed.

### Disposal regulations



The product must be disassembled and disposed of properly at the end of its service life.

► When disposing of the product, the applicable local and regional laws, directives and environmental regulations must be complied with!

#### **Materials**

The materials must be sorted according to material groups and taken to the appropriate collection points.

## Disassembly of component groups

#### WARNING

#### Live components

#### Risk of fatal injury from electric shock if touched

- Only trained, authorized staff may open the electrical compartment
- Observe the safety symbols
- 1. Disconnect the mains supply and supply cables.
- 2. Remove all product covers.

The product is now prepared for disassembly.

OptiSpray AP01.1 Disposal • 45



46 • Disposal OptiSpray AP01.1



## **Spare parts list**

## **Ordering spare parts**

When ordering spare parts for powder coating equipment, please indicate the following specifications:

- Type and serial number of your powder coating equipment
- Order number, quantity and description of each spare part

#### **Example:**

- Type OptiGun GA03 automatic powder gun Serial number 1234 5678
- Order no. 203 386, 1 piece, Clamp − Ø 18/15 mm

When ordering cable or hose material, the required length must also be given. The spare part numbers of this bulk stock is always marked with an \*.

Wearing parts are always marked with a #.

All dimensions of plastic hoses are specified with the external and internal diameter:

#### **Example:**

Ø 8/6 mm, 8 mm outside diameter (o/d) / 6 mm inside diameter (i/d)

#### **ATTENTION**

Use of non-original Gema spare parts

When using the spare parts from other manufacturers the explosion protection is no longer guaranteed. If any damage is caused by this use all guarantee claims become invalid!

Only original Gema spare parts should be used!



#### **OptiSpray AP01.1 Application pump** OptiSpray AP01.1 Application pump - complete (pos. 1-14, 24, 27) 1015 447 1 Allen cylinder screw – M5x130 mm 1010 431 2 Upper end piece 1010 428 Filter element - 3 µm, complete 3 1014 060# 4 Allen cylinder screw - M5x35 mm 1005 185 5 Filter element body 1010 046 6 Pinch valve hose – DN7.5 1017 438# 6.1 Braided sleeve - fit-up aid kit for pos. 6 (not shown) 1005 270 7 Allen cylinder screw - M5x65 mm 244 759 8 1010 433 Bushing 9 Upper pinch valve housing 1010 429 10 Lower pinch valve housing 1010 432 11 Fluid blocking ring 1010 354# 12 O-ring – Ø 26x2 mm 246 549# Valves assembly - complete (without pos. 14) 13 1010 305 Body - complete (for pos. 13) 14 1015 456 Nut with kink protection - M16x1-Ø 12 mm 15 1005 443 16 Elbow connection 1010 051 17 Allen cylinder screw - M5x20 mm 222 950 18 Allen cylinder screw - M4x12 mm 216 275 19 O-ring – $\emptyset$ 10x2 mm 243 000# 20 Plug 1010 052 O-ring – Ø 16x2 mm 21 1007 794# 22 Suction tube 1010 053 23 O-ring – $\emptyset$ 6x1 mm 217 115# 24 Connection/plug 200 859 25 Screw-in nipple - 1/8"-Ø 8 mm 1010 378 26 Hose connection – Ø 11.5/7 mm 1019 542 27 O-ring - Ø 7x1.5 mm 1013 549# 30 Powder hose suction side – Ø 4.5 mm (not shown) 1005 454\* Powder hose transport side – $\emptyset$ 11.5/7 mm (not shown) 31 1005 097\* 32 Plastic tube - Ø 8/6 mm, blue 103 497\* 33 Plastic tube – Ø 8/6 mm, black 103 152\* Plastic tube - Ø 8/6 mm, green 34 103 519\* Hose connection - Ø 8.1/4.5 mm 40 1010 372 41 O-ring - Ø 8x1.5 mm 248 878# 42 Adaptor 1010 370 43 Nut with kink protection - M12x1-Ø 8 mm 201 316 44 Maintenance set – pos. 3 (2x), 6 (2x), 6.1 (1x), 11 (2x), 12 (4x), 19 (1x), 27 (1x) 1015 435

# Wearing part

48 ● Spare parts list OptiSpray AP01.1

<sup>\*</sup> Please indicate length



## OptiSpray AP01.1 – spare parts

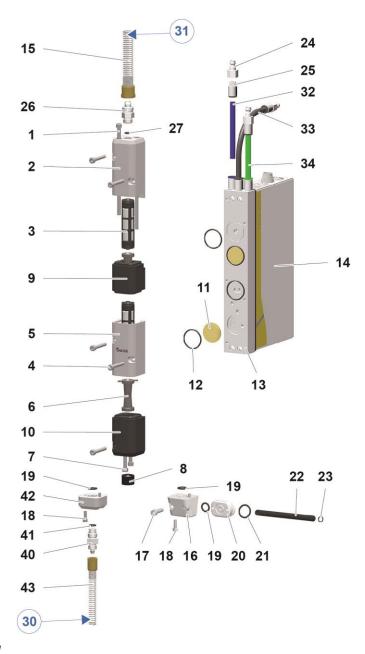


fig. 11

Item	Tightening torque [Nm]		
1	4.4 (greased)		
4	3.1 (greased)		
7	4.4 (greased)		
17	3.1		
18	0.5		

OptiSpray AP01.1 Spare parts list • 49



	OptiSpray Twin AP01.1 Application pump – complete (pos. 1-14, 26-28)	1019 707
1	Allen cylinder screw – M5x130 mm	1010 431
2	Upper end piece	1019 712
3	Filter element – 3 µm, complete	1014 060#
4	Allen cylinder screw – M5x35 mm	1005 185
5	Filter element body	1010 046
6	Pinch valve hose – DN7.5	1017 438#
6.1	Braided sleeve – fit-up aid kit for pos. 6 (not shown)	1005 270
7	Allen cylinder screw – M5x65 mm	244 759
8	Bushing	1010 433
9	Upper pinch valve housing	1010 429
10	Lower pinch valve housing	1010 432
11	Fluid blocking ring	1010 354#
12	O-ring – Ø 26x2 mm	246 549#
13	Valves assembly – complete (without pos. 14)	1010 305
14	Body – complete (for pos. 13)	1015 456
15	Nut with kink protection – M16x1-Ø 12 mm	1005 443
16	Elbow connection	1010 051
17	Allen cylinder screw – M5x20 mm	222 950
18	Allen cylinder screw – M4x12 mm	216 275
19	O-ring – Ø 10x2 mm	243 000#
20	Plug	1010 052
21	O-ring – Ø 16x2 mm	1007 794#
22	Suction tube	1010 053
23	O-ring – Ø 6x1 mm	217 115#
24	Connection/plug	200 859
25	Screw-in nipple – 1/8"-Ø 8 mm	1010 378
26	Hose connection – Ø 11.5/7 mm	1019 542
27	O-ring – Ø 7x1.5 mm	1013 549#
28	Dummy filter element – complete	1014 587#
30	Powder hose suction side – Ø 4.5 mm (not shown)	1005 454*
31	Powder hose transport side – Ø 11.5/7 mm (not shown)	1005 097*
32	Plastic tube – Ø 8/6 mm, blue	103 497*
33	Plastic tube – Ø 8/6 mm, black	103 152*
34	Plastic tube – Ø 8/6 mm, green	103 519*
40	Hose connection – Ø 8.1/4.5 mm	1010 372
41	O-ring – Ø 8x1.5 mm	248 878#
42	Adaptor	1010 370
43	Nut with kink protection – M12x1-Ø 8 mm	201 316
44	Maintenance set – pos. 3 (2x), 6 (2x), 6.1 (1x), 11 (2x), 12 (4x), 19 (1x), 27 (1x)	1015 43

<sup>\*</sup> Please indicate length

50 • Spare parts list OptiSpray AP01.1

<sup>#</sup> Wearing part



## OptiSpray Twin AP01.1 – spare parts

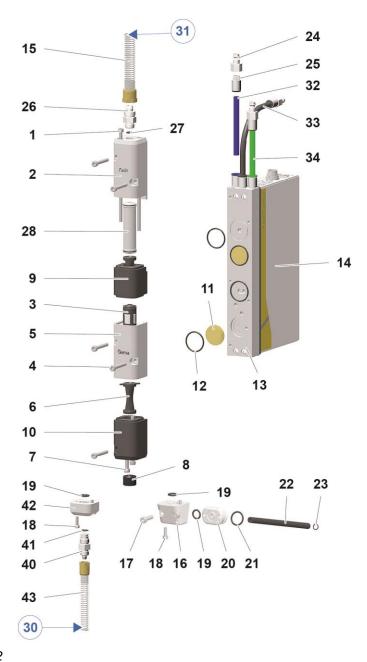


fig. 12

Item	Tightening torque [Nm]		
1	4.4 (greased)		
4	3.1 (greased)		
7	4.4 (greased)		
17	3.1		
18	0.5		

OptiSpray AP01.1 Spare parts list • 51



Connecting material			
1.1	Plastic tube – Ø 8/6 mm, black	103 152*	
1.2	Plastic tube – Ø 8/6 mm, blue	103 497*	
1.6	Plastic tube – Ø 8/6 mm, green	103 519*	
2.5	Connecting cable – 12 pins, 1.5 m	1000 991	
	Connecting cable – 12 pins, 2.2 m	393 398	
	Connecting cable – 12 pins, 5 m	1000 975	
	Connecting cable – 12 pins, 10 m	1000 976	
	Connecting cable – 12 pins, 15 m	1000 977	
	Connecting cable – 12 pins, 20 m	1000 978	

<sup>\*</sup> Please indicate length



fig. 13: Connecting material

52 • Spare parts list OptiSpray AP01.1



# Index

A	0	
About these instructions5	-	
Assembly19	Operation	
Assembly guide19	Overall view	13
В	Р	
Basic safety instructions7	Periodic checks	
	Pictograms	
C	Pin assignment	
Cleaning	Pinch valve diagnostic	
Cleaning	Pneumatic data	
Cleaning programs	Powder hose rinsing	
Compressed air hoses / cables15	Powder hoses	
	Powder output (reference values)	
Connecting material	Preparation for start-up	
Connection instructions	Presentation of the contents	
	Product description	
Connections	Product specific security regulations	
Conveying direction16	Pump disassembly	31
D	R	
Daily maintenance28	Rating plate	12
Decommissioning43	Reasonably foreseeable misuse	
Design and function13	Repair work	
Dimensions11	Repairs	
Disassembly of component groups45	Replacing	
Disposal45	Filter elements	30
Disposal regulations45	Filter elements	
Disuse for several days43	Pinch valve hoses	
	Solenoid valves	
E	Replacing the Application pump in an C	
Electrical data10		38
210011041 441411111111111111111111111111	Required spare parts	30, 34
F	Required Tools	
Fault clearance39	S	
Figure references in the text6		
	Safety	7
T .	Safety symbols	
	Scope of delivery	
Intended use9	Secondary functions	
	Shutdown	
M	Sound pressure level	
Main functions16	Spare parts list	47
Maintenance	Spraying air function / diffusers	14
Maintenance during storage44	Start-up	
Maintenance interval monitoring	Storage	
Maintenance of the dense phase pump28	Storage conditions	43
Maintenance schedule28	Switching on and off	
Maintonarioo soriodalo20	Conveying procedure	25



#### Rev. 03 01/20

Rinsing procedure25	Typical characteristics16		
т	w		
Technical Data10	Wearing parts28		

54 • Index OptiSpray AP01.1

